



REPEATABILITY OF SKIP SIGNAL : 0.001mm

RECOMMENDED OPERATING SPEED : 50~200mm/min




RATING : DC24V 20mA(Max)

(RECOMMENDED 10mA) NON-INDUCTIVE LOAD

DEGREES OF PROTECTION : IEC IP67

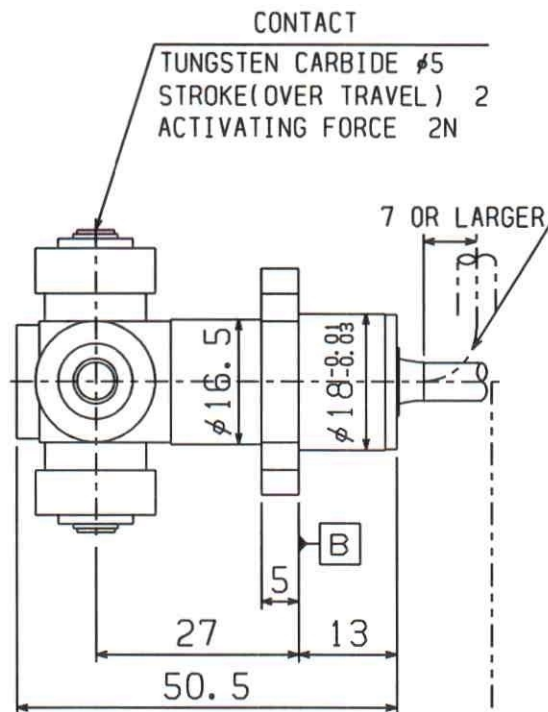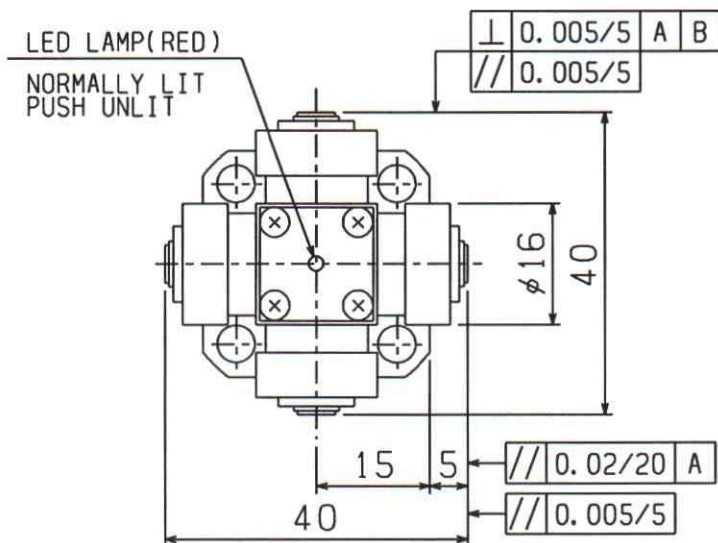

MINIMUM BENDING
RADIUS:7mm

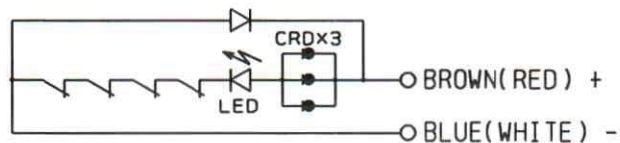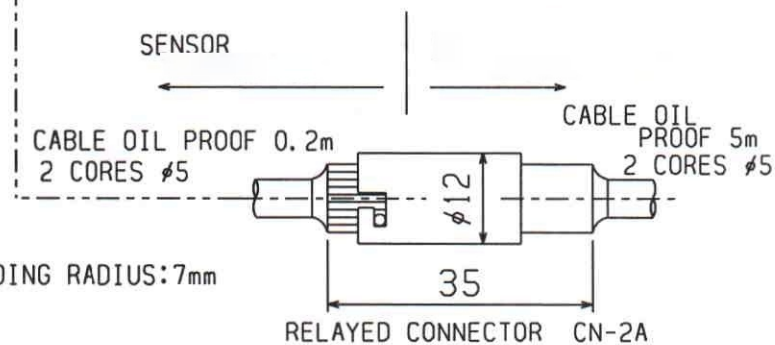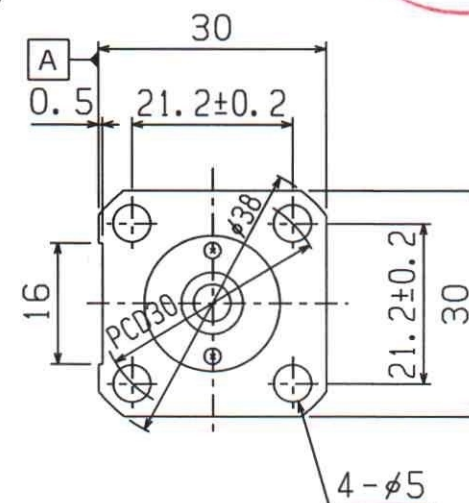

CABLE COLORS HAS CHANGED ON MARCH. 2004. RED-BROWN, WHITE-BLUE

YH4A12YENG4A1220E

APR	CHK	DRA
<i>Am</i>	04.7.5 HOSHI YAMA	01.10.24 HIJIKATA

NAME	TOOL SETTING
DRAWING NUMBER	PROBE
1/1	

